


TELEPHONE OUTLETS

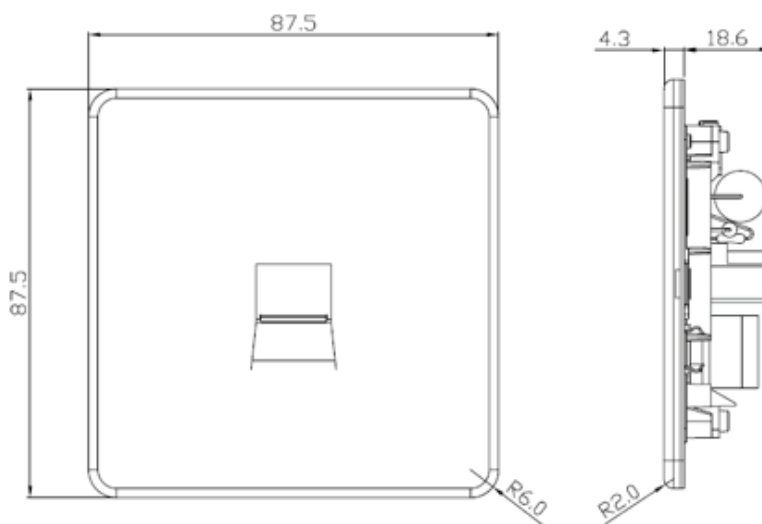

Master sockets contain a surge arrester and an R/C circuit filter. These are used by your service provider to get a fixed value resistance when they run line checks. Secondary or extension telephone sockets are used to run additional points of the original master socket. Standard BT type socket with screw type terminals.

Finish suffix:

Brushed chrome (BC), Polished chrome (PC), Black nickel (BN), Matt black (MB), Polished brass (PB)

Colour Insert suffix:

N/A

Model No:	SF7300xx	SF7400xx
Description:	Master socket	Extension socket
Dimensions (mm):	87.5 (w) x 87.5 (h) x 4.3(p)	
Net. Weight (kg):	0.13	
Min. mounting depth:	25mm	
IP Rating:	IP20	
Terminal:	Screw type	
Connections:	BT type socket	
Standard:	BS 5733	
Warranty:	15 years, 3 years on electronic components	
Construction:	Premium grade steel	
Origin of manufacture:	China	
Quality Assurance System:	ISO9001	
Declaration of Conformity (held on file):	Yes	

