


## INSTALLATION & MAINTENANCE MANUAL RCD9000

---



230V  
50Hz

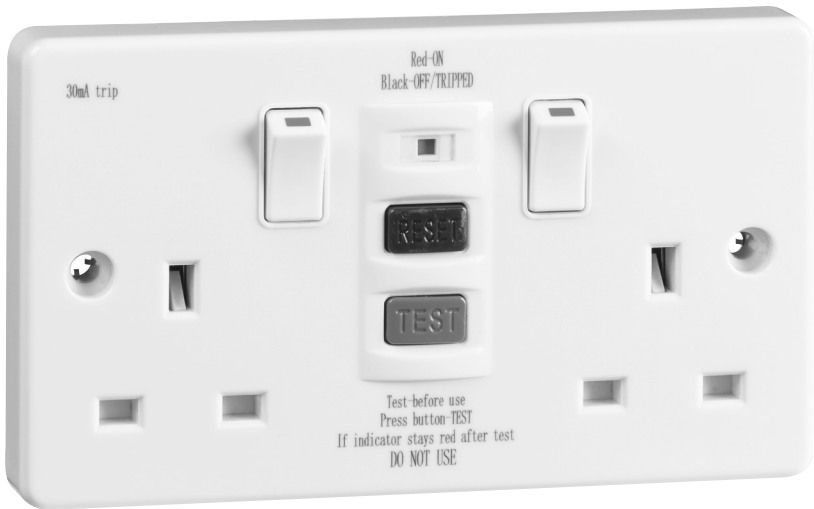

**ML**  
ACCESSORIES LTD



**RoHS**  
COMPLIANT



## GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.


These instructions should be used to aid installation of the following product:  
**RCD9000**

## SAFETY

- Installation of this socket should only be carried out by a qualified electrician or competent person to the latest Building and current IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Please note the IP (Ingress of Protection) rating of this product when deciding the location for installation
- This product is Class I and must be earthed

## INSTALLATION

- Provide power to the required point of installation
- Connect to the mains supply ensuring the correct polarity is observed (see Fig 1). Live (brown), Neutral (blue) and Earth (green/yellow)

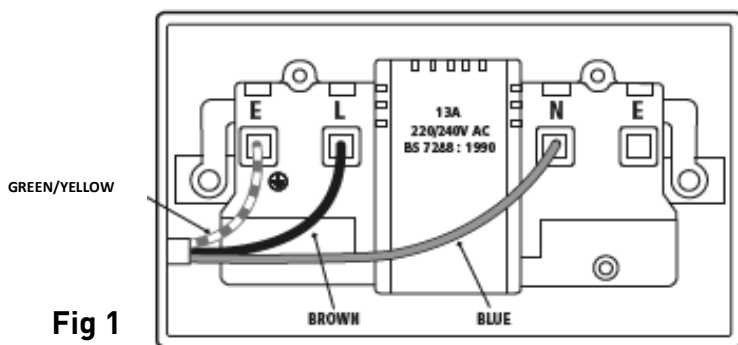

- Using the screws provided attach to desired mounting box
- Switch on power supply and check for correct operation

## RCD OPERATING INSTRUCTIONS

- Please ensure that you read and follow the RCD test procedure to ensure the RCD is working correctly each time before use

### **RCD Test Procedure**

- Ensure socket is switched on
- The red indicator should be visible in the clear window, if it is not, press the green RESET button, the red indicator should now be visible
- Press the blue TEST button, the red indicator should now disappear. If it does not, do not use the socket and consult a qualified electrician
- Test each time before use, then press reset to use

This is a Latching RCD socket which means the RCD will remain closed once set and will only trip when a hazardous earth fault occurs. If the unit loses supply - as in the case of a power cut - it will stay latched.

## WARNING

This product must be disconnected from the circuit if it subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

## GENERAL

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

## WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

# Knightsbridge<sup>®</sup>

the mark of quality



ML Accessories Limited  
LU5 5TA  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

SBSEP17\_V1